



Slideaway LCD KVM Console Module with 17" Display CL1200M

ATEN's new LCD KVM console, CL1200M, offers a space-saving, streamlined approach to IT environments by integrating a keyboard, 17" LCD monitor, and touchpad in a 1U Slideaway™ housing. The LCD display is built into the cover; the keyboard and touchpad are built into the base. Setup is fast and easy. There is no software to configure, no installation routines, and no incompatibility problems. Slide the console module section out; flip the cover up; and you are ready to go to work. When finished, flip the cover down and slide the console module away back into the rack.

For further convenience and flexibility, the CL1200M also supports an external keyboard, monitor, and mouse console that allows a second user to access the computers remotely or locally. Work with ATEN's IP access unit (CN5000), you can control and manage an attached computer or an attached KVM switch anywhere around the world.

There is no better way to save time and money than with a CL1200M installation. By using the CL1200M to manage your installation, you: (1) save all the space those standard components, keyboard, mouse, and monitor, would take up; (2) eliminate the expense of having to purchase a separate keyboard, monitor, and mouse for each computer if attaching to a KVM switch; (3) take advantage of upgrading your current system, since CL1200M is compatible with all ATEN and most of other brand names' KVM switches; (4) save time for installation. Just connect the cable between CL1200M and a KVM or a computer, and the CL 1200M is ready to serve you; and (5) get one extra console for remote access.

Distributor Part NO. :


Features:

- Integrated KVM console featuring a 17" LCD monitor in 1U height.
- Dual Consoles Design - remote access ready
- Compatible with all ATEN KVM Switches and most of KVM switch in the market
- Built in internal power
- 1280 x 1024 resolution assures crispy video output
- Less than 1 U high mountable rack
- Adjustable depth to fit within the rack
- Improved design-Single person installation (Optional)

Rack Mounting Kit	
Long (Optional)	68cm - 100cm

Short (Standard)	42cm - 72cm
Easy Installation Rack Mounting Kit	Depth
Long (Optional)	68cm - 105cm
Short (Optional)	52cm - 70cm

Diagram :

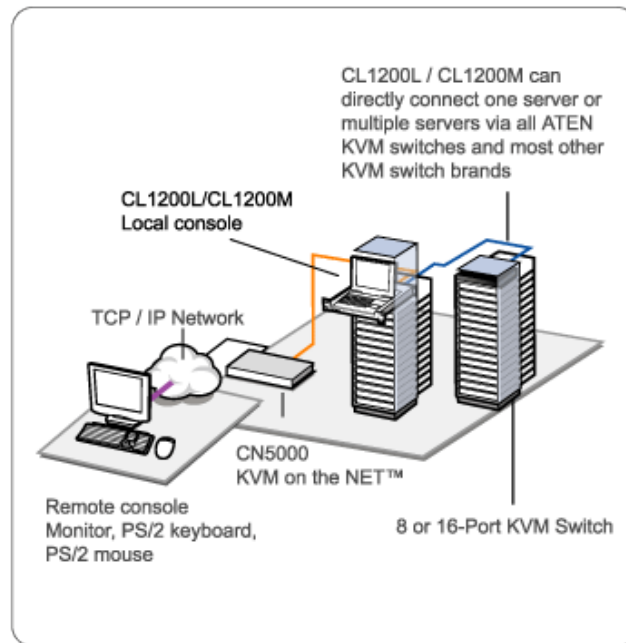

Requirements:

PS/2 type KVM, or computers with PS/2 connections

Package Content:

- 1x CL-1200 Slideaway™ Console Module with Standard Rack Mounting Kit
- 1 x Custom KVM Cable (6 ft. PS2)
- 1 x Power Cord
- 1 x Rack Mounting Kit
- 1 x User Manual
- 1 x Quick Start Guide

Specification :

* Master Carton	
Width	26.75 in.
* Master Carton Qty.	1
Depth	28.25 in.
Height	5.625 in.
Connectors	
Power	3 prong AC Socket
*** Unit Package Dimensions	
Width	26.75 in.
Height	5.625 in.
Depth	28.25 in.
Computer Connections	
Direct	1
Emulation	
Mouse	PS/2
Keyboard	PS/2
Console Connectors	
Mouse	1 xMini Din-6 Female
Keyboard	1 x Mini Din-6 Female
Monitor	1 x HDB-15 Female
Weight	
Master Carton Wt.	42.9 lbs.
Unit Pack Wt.	42.9 lbs.
**** Unit Dimensions	
Width	18.9 in. (48.0 cm)
Height	1.8 in. (4.5 cm)
Depth	23.6 in. (60.0 cm)
CPU Connectors	
Keyboard, Mouse, and Monitor	1 x SPHD-15 Female(Yellow)
Operating Temperature	32F~122F (0C~50C)
Storage Temperature	-4F~140F (-20C~60C)
Video Resolution	17" LCD : 1280 x 1024; DDC2B
Power Consumption	120V 60Hz 22.8W / 230V 50Hz 24W